
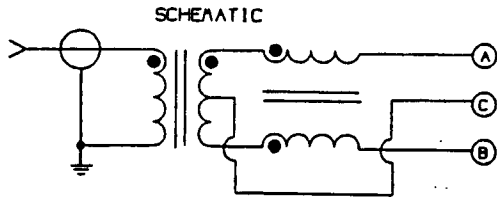


# 040-0083 50Ω:900Ω Balun

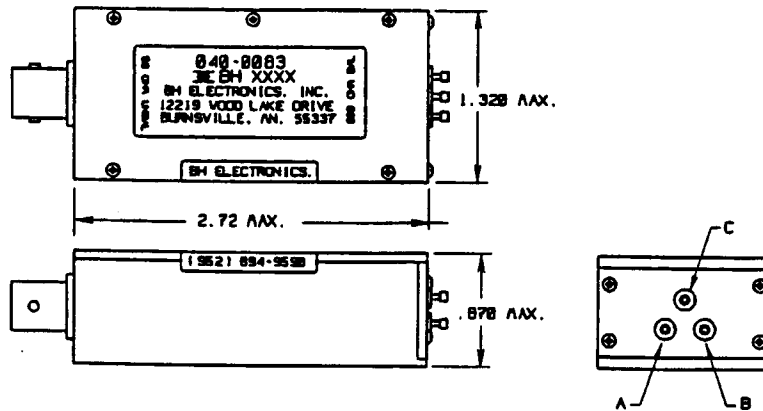

## Electrical Specifications

Insertion Loss: 1dB Max (200Hz - 1.0MHz)

Return Loss (Bi-directional)

17.5dB Min (200Hz - 500Hz)

20dB Min (500Hz - 750KHz)


17.5dB Min (750KHz - 1.0 MHz)

Common-mode Rejection: 50dB Min

(200Hz - 1.0MHz)

040-0083 Insertion Loss(2 Units Back to Back)


NETWORK	Cor	CRS_A	dB
A:REF	B:REF	LEFT	-2.00000
0.000	180.0	2 355 869.955 Hz	
[ dB ]	[ deg ]	RIGHT	Hz

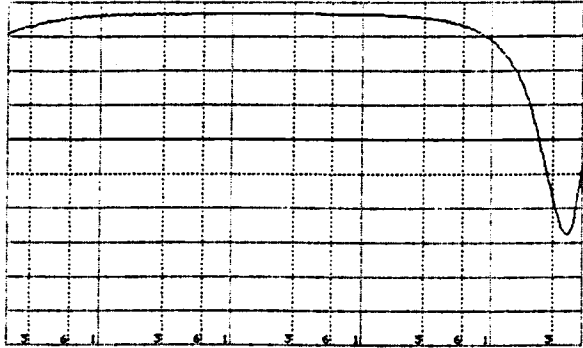

DIV 500.0m    DIV 36.00    START 200.000 Hz  
 RBW: 30 Hz ST:1.70 min RANGE:R= 0,T= 0dBm

040-0083 50-900 Ohm Return Loss

S22	Cor	CRS_A	dB
A:REF	B:REF	LEFT	-20.0000
0.000	180.0	1 385 782.004 Hz	
[ dB ]	[ deg ]	RIGHT	Hz

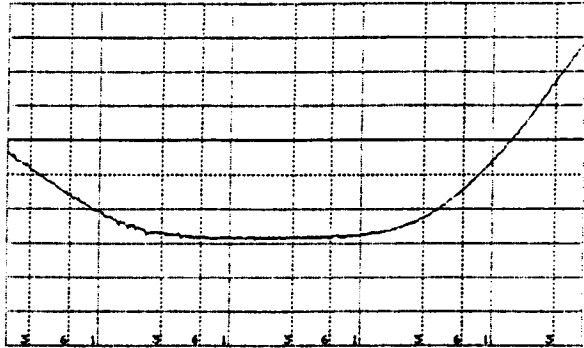

DIV 5.000    DIV 36.00    START 200.000 Hz  
 RBW: 30 Hz ST:1.70 min RANGE:R= 0,T= 0dBm

**BH**® BH Electronics

12219 Wood Lake Drive Burnsville, MN 55337

Phone: 952-894-9590 Fax: 952-894-9380 www.bhelectronics.com