

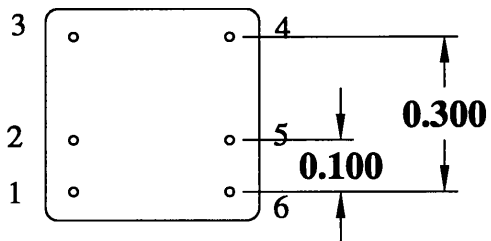
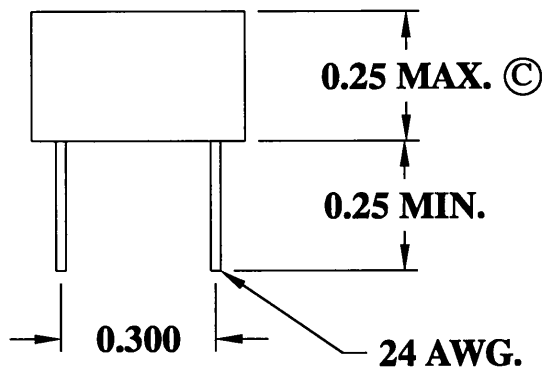


MECHANICAL

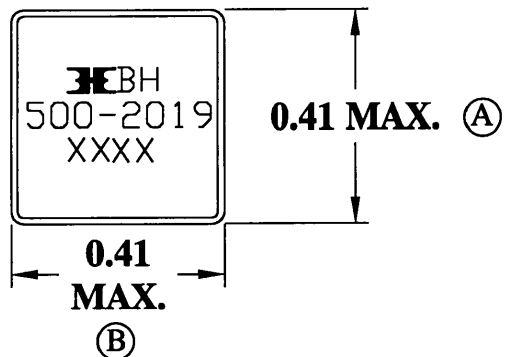

SCHEMATIC



ELECTRICAL SPECIFICATIONS

TURNS RATIO: 1CT:5CT

OPEN CIRCUIT INDUCTANCE: 400uH MIN. (1-3) 100 KHz 20mV

DC RESISTANCE: (1-3) 1 OHMS MAX. (6-4) 4.0 OHMS MAX.

HIGH VOLTAGE TEST: 1500 VRMS FOR 1 SEC.

ET CONSTANT: 18.3 Vu SEC.

ISSUE	DATE	REVISION	BY
D	10-6-00	ECR #4831 UPDATE TO CAD	<i>km</i>
C	2-23-00	ADD DIMENSION TARGETS	BM
B	5-8-95	REMOVE STANDOFFS CORRECT DCR	JDC
A	4-26-94	CUSTOMER PRINT	BM

DESIGN PER:	BH CATALOG +5V TO +24V
DRAWN:	K. LOFTUS
ENGR:	B. MARKS
UNLESS OTHERWISE SPECIFIED: DIMENSIONS IN INCHES, TOLERANCES NON-CUMULATIVE .XX±.01 .XXX±.005	
PAGE 1 OF 1	

BH [®] BH ELECTRONICS, INC.
BURNSVILLE & MARSHALL, MN

© 1998 BH Electronics

TITLE:
ISOLATION TRANSFORMER

PART NO.
500-2019